

# Estimation for control – Practical Assignment 8

## Unknown input observer design

### Logistics

- This practical assignment should be carried out by a group of maximum two students.
- The assignment solution consists of Matlab code and Simulink model. This code will be checked and run by the teacher during the lab class, and your attendance to the lab will only be registered if you have a working, original solution. Validated attendances for all the labs are necessary for eligibility to the exam. Moreover, at most two labs can be recovered at the end of the semester, which means accumulating three or more missing labs at any point during the semester automatically leads to final ineligibility.
- Discussing ideas among students is encouraged; however, directly sharing and borrowing pieces of code is forbidden, and any violation of this rule will lead to disqualification of the solution.

### Assignment description

#### Prerequisite:

- A linear model, with state vector  $x = [x_1, x_2, \dots, x_n]^T$ , and input vector  $u = [u_1, u_2, \dots, u_m]^T$  where  $n \geq 3$ , is the number of state variables,  $m \geq 1$ , is the number of inputs, and the dynamic equation has the form:

$$\begin{aligned}\dot{x} &= Ax + Bu \\ y &= Cx,\end{aligned}\tag{1}$$

where  $A$  and  $B$  are the system matrices and  $C$  is the output matrix.

- discrete-time linear model:

$$\begin{aligned}x(k+1) &= A_d x(k) + B_d u(k) \\ y(k) &= C x(k)\end{aligned}\tag{2}$$

where  $A_d$  and  $B_d$  are the discrete-time system matrices.

### Unknown input observer design

In some cases it can happen that the system is affected with some disturbance inputs what we cannot directly measure, for instance, imagine the case when we have a pendulum system, which we want to stabilize around an equilibrium point. The control works well, but the experiment is in a windy place and the model is disturbed with a constant wind. If we know some information of the effect of the disturbances, like what states are affected, with what amplitude and so on, we can include it in the model. The following continuous-time linear model can be considered in these cases, including the disturbance vector:

$$\begin{aligned}\dot{x} &= Ax + Bu + Ed \\ y &= Cx,\end{aligned}\tag{3}$$

where  $d \in \mathbb{R}^{n_d}$  is the disturbance vector and  $E$  is the disturbance matrix. It is assumed that the  $d$  is constant or piece-wise constant, so the derivative is 0:  $\dot{d} = 0$ .

Note that, the notation  $0$  defines a zero matrix of appropriate dimension.

We denote the extended state vector with  $x_e := \begin{bmatrix} x \\ d \end{bmatrix}$ , and the dynamics of  $x_e$  is:

$$\begin{bmatrix} \dot{x} \\ \dot{d} \end{bmatrix} = \begin{bmatrix} A & E \\ 0 & 0 \end{bmatrix} \begin{bmatrix} x \\ d \end{bmatrix} + \begin{bmatrix} B \\ 0 \end{bmatrix} u. \quad (4)$$

The objective here is to estimate these disturbances, so later we can use them in the controller design to compensate their effects. We denote

$$A_e := \begin{bmatrix} A & E \\ 0 & 0 \end{bmatrix}, \quad B_e := \begin{bmatrix} B \\ 0 \end{bmatrix}, \quad C_e := [C \ 0] \quad (5)$$

so the extended model has the form:

$$\begin{aligned} \dot{x}_e &= A_e x_e + B_e u \\ y &= C_e x_e. \end{aligned} \quad (6)$$

We have the extended model dynamics for which we can design a linear observer. Note that, in order to design the observer first we need to verify if the  $(A_e, C_e)$  pair is observable. The rest of the observer design is the same as in the standard Luenberger observer design case, but for equation (6). The observer has the form:

$$\begin{aligned} \dot{\hat{x}}_e &= A_e \hat{x}_e + B_e u + L(y - \hat{y}) \\ \hat{y} &= C_e \hat{x}_e, \end{aligned} \quad (7)$$

where  $\hat{x}_e$  is the estimated state vector, and  $\hat{y}$  is the estimated output.

### Example 1

Consider the following linear model:

$$\begin{aligned} \dot{x}_1 &= x_2 + 5d \\ \dot{x}_2 &= -2x_1 - 3x_2 + 4u, \end{aligned} \quad (8)$$

$$y = x_1$$

this can be written in the form of (3):

$$\begin{aligned} \begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} &= \underbrace{\begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix}}_A \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \underbrace{\begin{bmatrix} 0 \\ 4 \end{bmatrix}}_B u + \underbrace{\begin{bmatrix} 5 \\ 0 \end{bmatrix}}_E d \\ y &= \underbrace{\begin{bmatrix} 1 & 0 \end{bmatrix}}_C. \end{aligned} \quad (9)$$

Since it is assumed that the disturbance is piece-wise constant ( $\dot{d} = 0$ ), the extended state vector, and the extended matrices are the following:

$$x_e = \begin{bmatrix} x_1 \\ x_2 \\ d \end{bmatrix}, \quad A_e = \begin{bmatrix} A & E \\ 0 & 0 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 5 \\ -2 & -3 & 0 \\ 0 & 0 & 0 \end{bmatrix}, \quad B_e = \begin{bmatrix} 0 \\ 4 \\ 0 \end{bmatrix}, \quad C_e = [1 \ 0 \ 0]. \quad (10)$$

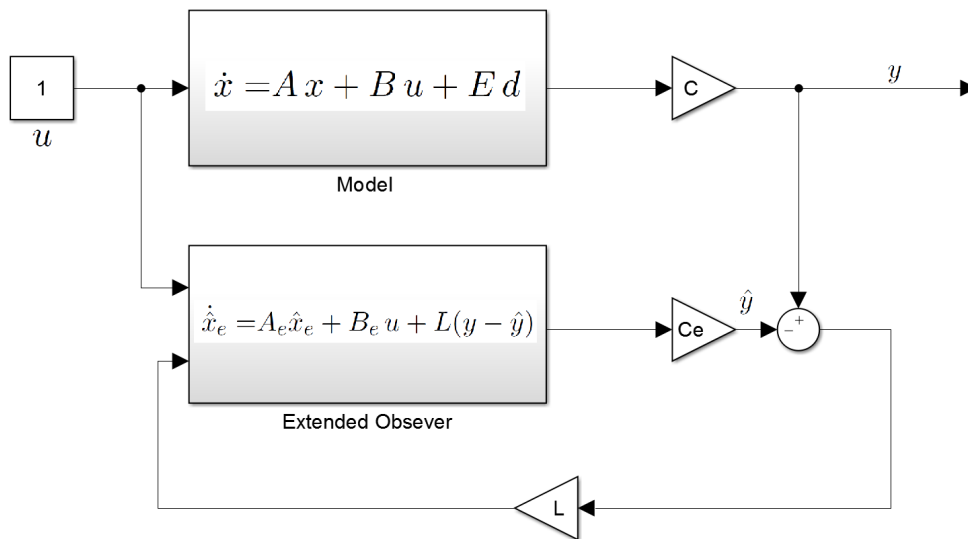


Figure 1: Connection diagram

On Fig. 1 we can see the schematic representation of the model and observer connections.

The discrete-time extended observer design follows the same procedure as in the continuous-time. Just we need to pay attention because the constant disturbance in discrete-time means  $d(k + 1) = d(k)!$ .

**Requirements:**

- Design a linear continuous-time unknown input observer
- test the obtained observer with a piece-wise constant  $d$
- Design a linear discrete-time unknown input observer
- test the obtained observer with a piece-wise constant  $d$

*Hint:* Useful Matlab functions `obsv`, `place`.